



DD-18+

THE NEW INDUSTRY BENCHMARK IN LOW DISTORTION BASS



Features

- *One-Touch Auto-EQ+ automates the seamless blend of subwoofer, system and room*
- *Use your PC for manual adjustments and real time feedback of your bass performance*
- *The industry's lowest distortion bass - under .5%*
- *Sophisticated cone design for fast, accurate motion*
- *Six-layer, custom wound voice coil assures better heat dissipation*
- *Massive motor structure for amazing low-frequency energy*

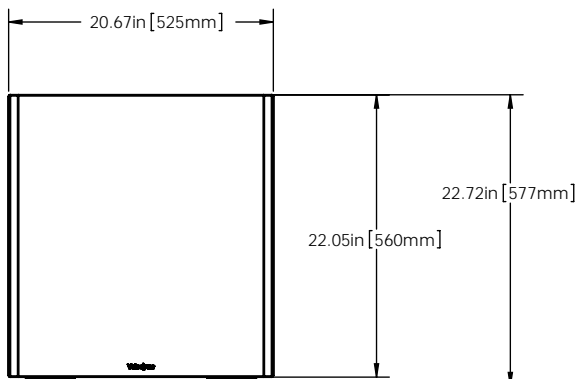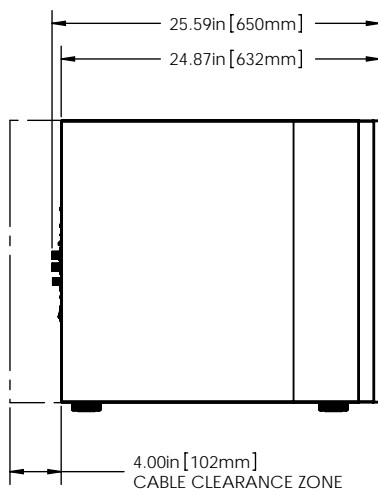

SPECIFICATIONS

| MODEL | DD-18+ |
|---|---|
| Driver | 18" forward firing |
| Amplifier Class D | 3000 watts Dynamic 1250 watts RMS Power |
| Frequency Response | Overall 8.8 - 300 Hz (+/- 3 dB) 14.4 - 120 Hz |
| THD | <0.5% (typical) |
| High Pass Crossover | 80 or 100 Hz at 6 dB/octave |
| Low Pass Crossover | 40 Hz to 199 Hz (variable in 1 Hz increments) selectable slope Default: 80 Hz @ 24 dB/Octave |
| Phase | 0 to 180 degrees (variable in 15 degree increments) |
| Polarity | Adjustable (+/-) |
| Magnet Structure | 39.7 lbs. |
| Voice Coil | Six-layer, 75mm |
| Cone | Fiberglass Rohacell Laminate |
| INPUTS | |
| LFE (Mono) | Line level (RCA), Nominal Impedance 47K, Balanced (XLR), Nominal Impedance 10K |
| Input (L&R) | Line level (RCA & XLR) |
| Microphone | Balanced (Mini-XLR, cable included) |
| Speaker Level (L&R) | Bare wire, banana plugs, or spade lugs |
| OUTPUTS | |
| Thru (L&R) | Line level (RCA & XLR) |
| Output (L&R), High-Pass | Line level (RCA & XLR) |
| Included Accessories | Full feature remote control, DD+ accessory kit and video cable |
| Finishes | Black gloss ebony, satin cherry or walnut |
| Dimensions (H/W/D) (includes feet and connectors) | 22.7" x 20.7" x 25.6" (58 x 53 x 65 cm) |
| Shipping Weight (approx) | 142 lbs. |
| Warranty (parts/labor) | Three years (electronics) Five years (drivers) |